


Wind-lock® GFRC Stealth Access Panel

Glass Fiber Reinforced Cement Access Panels for Exterior Walls and Ceilings

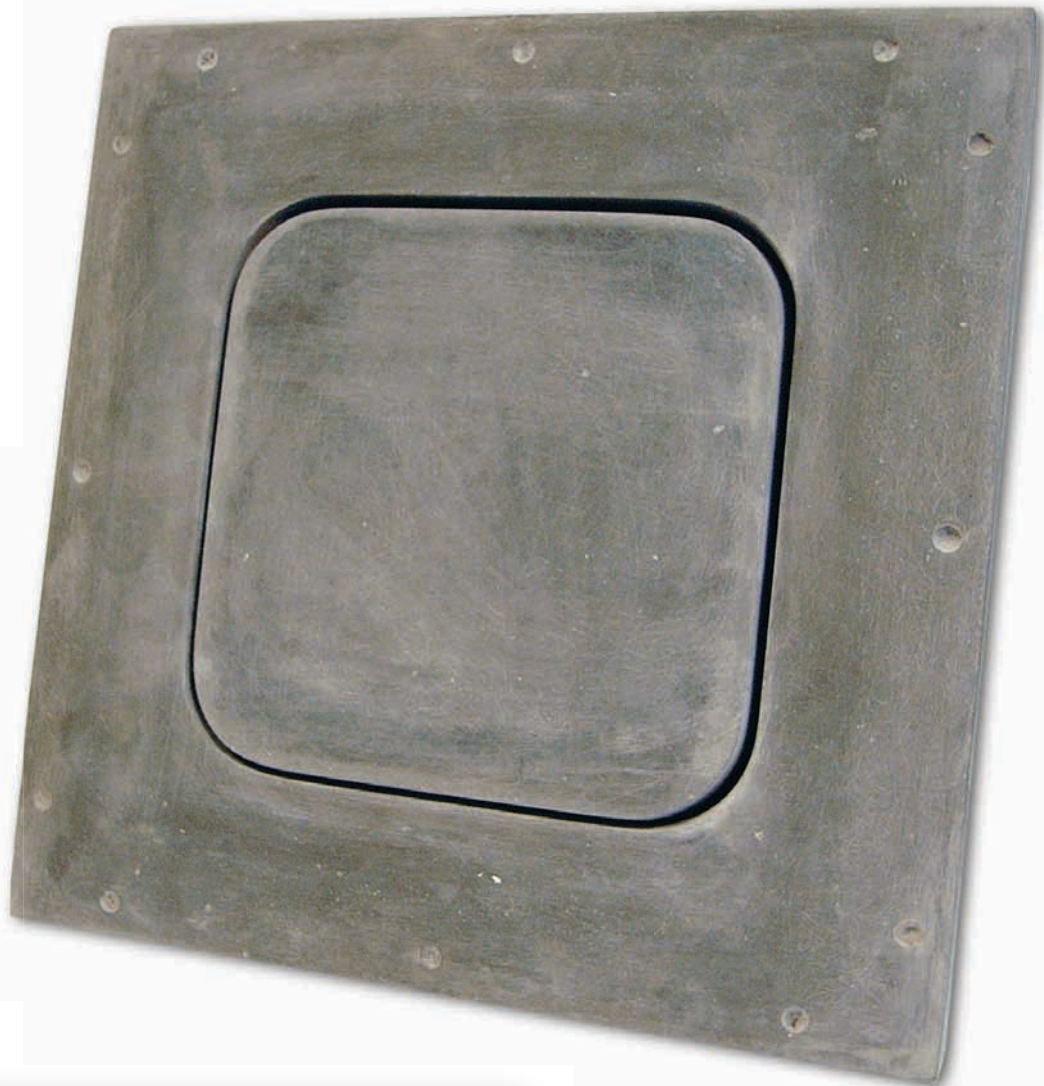

Description

The same great access panel is now available in GFRC (glass fiber reinforced cement) for exterior installations! Applications include exterior soffits, porte-cochère, covered drive-up and any other location where you need discrete access and a weather-resistant panel.

- Available in both drop-in and hinged door
- Durable, weather-resistant cement prevents cracking or rusting
- Rounded edges prevent chipping
- Can be finished in stucco, plaster or acrylic finishes



1055 Leisz's Bridge Rd.
Leesport, PA 19533
Toll-Free 1-800-872-5625
Fax 1-800-854-6614
www.wind-lock.com

Wind-lock® GFRC Stealth Access Panel

Glass Fiber Reinforced Cement Access Panels for Exterior Walls and Ceilings

Cement Board
Embedment



Specifications

- Shell Thickness 1/8" - 1/16"
- Surface Burning Characteristics Flame Spread 0
- ASTM E 84 (Standard Test Method) Smoke Developed 5
- Fuel Contribution 5
- ASTM C 150 Standard Specification for Portland Cement



Sizes

<i>Drop-in</i>	<i>Hinged</i>	<i>Access Opening</i>	<i>Rough Opening</i>
TR-APC009	TR-HAPC009	9" x 9"	15" x 15"
TR-APC012	TR-HAPC012	12" x 12"	18" x 18"
TR-APC016	TR-HAPC016	16" x 16"	22" x 22"
TR-APC018	TR-HAPC018	18" x 18"	24" x 24"
TR-APC024	TR-HAPC024	24" x 24"	30" x 30"



1055 Leisch's Bridge Rd.
Leesport, PA 19533
Toll-Free 1-800-872-5625
Fax 1-800-854-6614
www.wind-lock.com