



# Product Specifications



## PRODUCT NAME

SillDry window and door sill pan flashing

## MANUFACTURER

SillDry Industries, LLC  
 2990 Bergey Road, Hatfield PA 19440  
 Phone: 215-634-9440  
 Fax: 215-494-0052  
[www.silldry.com](http://www.silldry.com)

## PRODUCT DESCRIPTION

SillDry window and door sill pan flashing is a fast and easy, patented one-piece expandable, waterproof sill pan flashing. 100% Precision Made in USA, it has revolutionary Smart Accordion Technology® allowing for easy installation in virtually any rough opening. Its raised back dam, built-in slope, and shims help protect the most vulnerable areas of window and door openings.

## BASIC USE

SillDry's patented drainage design collects and directs to the exterior water that can leak through or around the window and door openings. It is made of a durable waterproof TPO material and has a 1/2 inch (7.5°) front to back positive slope. It is one-piece, requiring no onsite assembly and can be installed in seconds with only two screws.

SillDry's versatility allows for the following applications:

- Membrane/Drainage Systems
- New Residential Construction
- Commercial Construction
- Wood Framing
- Steel Stud

## SIZE

Depth: 4 5/8 inches and 6 5/8 inches  
 Standard sizes available from 18 inches to 12 feet  
 Custom sizes available above 12 feet

## MATERIAL DURABILITY

Injection molded thermoplastic olefin (TPO), ideal in applications for industrial and automotive markets where material durability for long-term use are integral to part function. Highly resistant to impacts and tears, waterproof, low thermal conductivity, UV resistant, and impact resistant.

## APPLICABLE STANDARDS


- Compatible with virtually all different manufacturers' products
- Pan Flashing Systems and Subsills for Weatherability ASTM E2112-07 (5.16)

## CODE COMPLIANCE

Exceeds 2015 and 2018 International Residential Code (IRC) and International Building Code (IBC) requirements.

## GUIDELINES

SillDry sill pan flashing should be installed and integrated with the wall's weather resistive barrier in a shingle-lap fashion. Specially designed raised rear back dam allows for the easy installation of backer rod and sealant joint for extra energy efficiency. Install SillDry on subsill using pan head screws (not included). See diagram on right for placement. Add 1" to recommended height of the manufacturer's rough opening to accommodate the built in 1/2" (7.5°) slope in the SillDry sill pan. Visit [www.silldry.com](http://www.silldry.com) for video installation instructions.

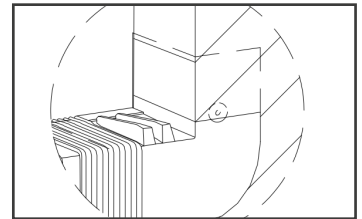

## WARRANTY

Please see SillDry Limited Warranty at [www.silldry.com](http://www.silldry.com)

Physical Properties	Typical Values	Test Method
Notched Izod Impact @ -30°C	11 kJ/m <sup>2</sup>	ISO 180
Notched Charpy Impact @ -30°C	7.5 kJ/m <sup>2</sup>	ISO 179
Tensile Strength @ Yield (50mm/minute)	16 MPg	ISO 527
Tensile Modulus (1mm/minute)	1,400 MPa	ISO 527
Flexural Modulus (2mm/minute)	1,100 MPa	ISO 178
Deflection Temp. @ 455 KPa	98°C	ISO 75
Multiaxial Impact @ -30°C	17 J	ASTM D3763
Multiaxial Impact @ -30°C	14 J	ISO 6603